



JORAN hexapod

High resolution ultra heavy payload large size



KEY FEATURES

- High stability
- Resolution 0.5 μ rad
- Large payload capacity 1500 kg (more upon request)



APPLICATIONS


- Synchrotrons: mirror or chamber supports
- Optics



JORAN hexapod has been developed in collaboration with ESRF synchrotron to position mirrors with very high resolution.



JORAN hexapod size has been adapted to the beam height of the Australian Synchrotron.

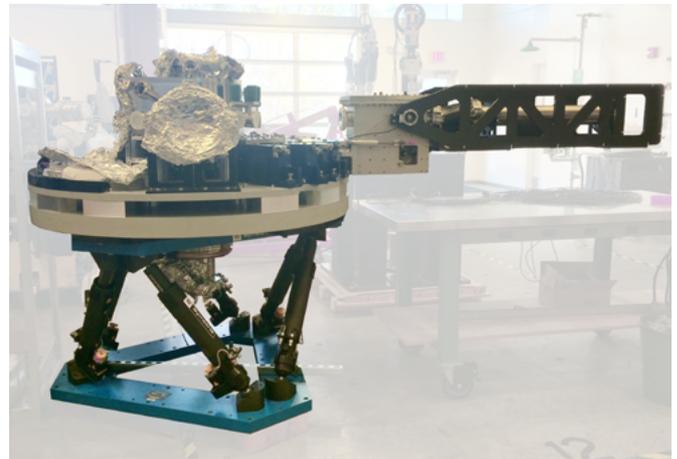

JORAN actuators at LBL are longer to enable a $\pm 12.5^\circ$ rotation around Z. This JORAN hexapod has also been customized to support a 3.2 tons payload.

	JORAN ST	JORAN BL
	for lower speed	for higher speed
Motion and positioning		
Travel range Tx, Ty (mm)	± 65	± 65
Travel range Tz (mm)	± 50	± 50
Travel range Rx, Ry, Rz (deg)	± 3	± 3
Resolution Tx, Ty, Tz (µm)	0.1	0.1
Resolution Rx, Ry, Rz (µrad)	0.5	0.5
Repeatability Tx, Ty, Tz (µm)	± 0.5	± 0.5
Repeatability Rx, Ry, Rz (µrad)	± 2	± 2
Speed (mm/s; deg/s)	0.25; 0.05	1; 0.2
Mechanical properties		
Payload capacity (kg) (vertical orientation)	1500	1500
Motor type	Stepper motor	Brushless motor
Miscellaneous		
Operating temperature range (°C)	0 to + 50	0 to + 50
Material	Aluminum, steel, stainless steel, ceramic	Aluminum, steel, stainless steel, ceramic
Footprint (mm)	Ø 1300	Ø 1300
Height in middle position (mm)	800	800
Mass (kg)	1500	1500
Cable length (m)	5	5
Options	Customized platform design Absolute encoders Adjustable height Heavier payload	Customized platform design Absolute encoders Adjustable height Heavier payload
Controller		
Controller type	ALPHA	ALPHA
Interface	Ethernet, USB	Ethernet, USB
Power supply	110-240 VAC / 50-60 Hz	110-240 VAC / 50-60 Hz

Datasheet subject to change without notice. All data are superseded by any new release. R160608

The performances are specified for single axis motions, with all other axes at midrange and for a rotation center in the middle of the mobile platform.

