



BREVA hexapod

High resolution hexapod medium size



Symétrie



KEY FEATURES


- Payload capacity up to 200 kg
- Linear travel range ± 75 mm
- Angular travel range $\pm 22^\circ$

APPLICATIONS


- Instrumentation
- Aeronautics and space
- Optics
- Metrology
- Testing laboratories
- Synchrotrons



This hexapod positions a vacuum chamber containing a gas sample and offers a $\pm 20^\circ$ angular range.

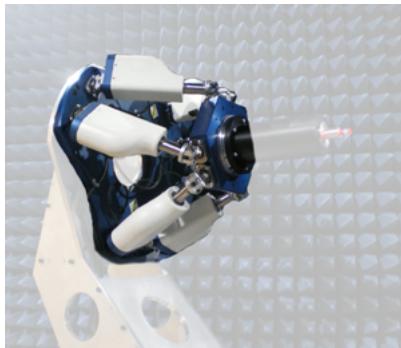


This hexapod integrates a 360° rotation in its mobile platform. It orients a microwave source to qualify microwave antennas.

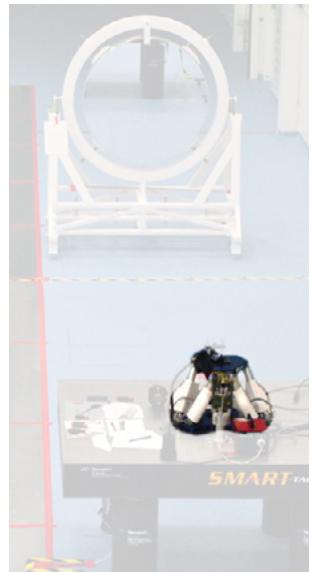

The BREVA hexapod is part of the ESA Star Tiger-2 test set-up to simulate a way to eclipse the Sun in space with two satellites flying in tight formation.

	BREVA DC	BREVA ST	BREVA BL
	for lighter payload	for higher payload	for higher speed and payload
Motion and positioning			
Travel range Tx, Ty (mm)	± 75	± 75	± 75
Travel range Tz (mm)	± 50	± 50	± 50
Travel range Rx, Ry (deg)	± 20	± 20	± 20
Travel range Rz (deg)	± 22	± 22	± 22
Resolution Tx, Ty, Tz (μm)	0.5	0.5	0.5
Resolution Rx, Ry, Rz (μrad)	2.5	2.5	2.5
Repeatability Tx, Ty, Tz (μm)	± 1	± 1	± 1
Repeatability Rx, Ry, Rz (μrad)	± 5	± 5	± 5
Speed (mm/s; deg/s)	8; 2.5	0.8; 0.25	3; 1
Mechanical properties			
Stiffness X, Y (N/ μm)	5	5	5
Stiffness Z (N/ μm)	32	32	32
Payload capacity (kg) (vertical orientation / horizontal orientation)	25 / 10	200 / 80	200 / 80
Motor type	DC motor, gearbox	Stepper motor, gearbox	Brushless motor, gearbox
Miscellaneous			
Operating temperature range (°C)	0 to + 50	0 to + 50	0 to + 50
Material	Aluminum, steel, stainless steel, plastic	Aluminum, steel, stainless steel, plastic	Aluminum, steel, stainless steel, plastic
Size mobile platform (mm)	Ø 300	Ø 300	Ø 300
Central aperture (mm)	Ø150	Ø150	Ø150
Height in middle position (mm)	350	350	350
Mass (kg)	32	36	36
Cable length (m)	3	3	3
Options	Absolute encoder Clean room compatibility Vacuum compatibility Customized platform design		
Controller			
Controller type	ALPHA		
Interface	Ethernet, USB		
Power supply	110-240 VAC / 50-60 Hz		

The performances are specified for single axis motions, with all other axes at midrange and for a rotation center in the middle of the mobile platform.

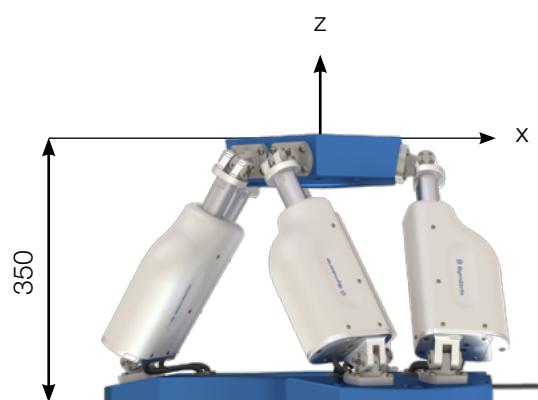

Hexapod in middle position

